


Data Sheet

PBL CCT

LED Downlight



- **Model**
PBL Downlight
- **Color temperature(K)**
Tunable-white light source(3000,4000,6500)




Product Overview

Type	LED Downlight
Application	Indoor
Color temperature(K)	Tunable-white light source (3000,4000,6500)
Efficacy(lm/W)	100Lm/W
Installation	Recessed
Method Orientation	Fixed
Light source	LED SMD
CRI	RA>80
Ingress protection	IP20
Input voltage(V~)	220-240
Frequency(Hz)	50/60
Dimmable light	NO
Displacement factor	≥ 0.9
Beam angle	Non-directional
Operating temp. (°C)	-20 ~ 40
Switching Cycles	12,500x
Lifetime(H)	50.000H
Warranty(years)	3

Product Specification

Code	Power	Lumen	C/O (mm)	Dia.(A)	Height(B)
02277000129	6W	540lm	70mm	96mm	50mm
02277000229	9W	900lm	100mm	122mm	50mm
02277000329	15W	1400lm	140mm	178mm	53mm
02227000429	21W	2000lm	200mm	226mm	58.5mm

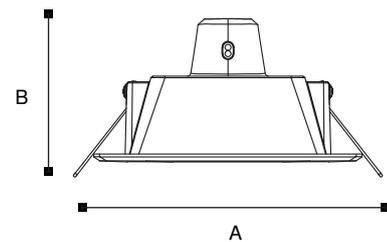

Al Nasser Group

Salah Ad Din Al Ayyubi Rd, Al Malaz,
P.O. Box 1246 Riyadh 11431, Saudi Arabia

Tel : +966 11 4777 70 0

Fax: +966 11 4789 46 9

www.alnassergroup.com