

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

# RUT

MEDIUM SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



E26.110.T1K

	<b>NEW</b>	<b>NEW</b>
<b>6,5W</b>	<b>8,5W</b>	<b>11W</b>
<b>800 lm</b>	<b>920 lm</b>	<b>1200 lm</b>
<b>2700 K</b>	<b>2700 K</b>	<b>4000 K</b> <b>6500 K</b>
	<b>90% HUMIDITY</b>	<b>VOLTAGE SURGE RESISTANT</b>
<b>+80°C</b>		
<b>-30°C</b>		
<b>INDOOR &amp; OUTDOOR USE</b>		


MADE IN ITALY



**RUT - LANTERN COMPONENTS**

**IP55**



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*



Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

***TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*



**DIFFUSER** made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

***DIFFUSORE** in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).*

**CAGE** made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

**RUT**

E26.000 \*



**Dimensions and weight**

Height: 410 mm  
Width: 260 mm  
Depth: 227 mm  
Weight: 1,3 Kg

**Moulded colours:**

Black  White

**Painted colours:**

Antique green  Antique bronze

**Diffuser PMMA:**

Clear  Opal

**E27 FILAMENT**

**E27 CCT SET(\*)**

**100 - 240 V**

\*ADD. SUFFIX



suitable lamps: CFL-LED max 160 mm		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
	<b>6,5W</b>	<b>800 lm</b>	<b>2700 K</b>	.F1R
	<b>8,5 W</b>	<b>920 lm</b>	6500 K 4000 K 2700 K	.V1K
	<b>11 W</b>	<b>1200 lm</b>	6500 K 4000 K 2700 K	.T1K

- perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

6,5W filament = 60W incandescent  
8,5W CCT = 75W incandescent  
11W CCT = 75W incandescent

**SAVE up to 89%**

**LED LAMPS**


Comply with: EU2019/2015  
EU2019/2020  
Technical details on page 596.

**CCT SETTABLE LED LAMP(\*)**

2700 K 4000 K 6500 K

CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

**PHOTOMETRIC DATA SAMPLE**

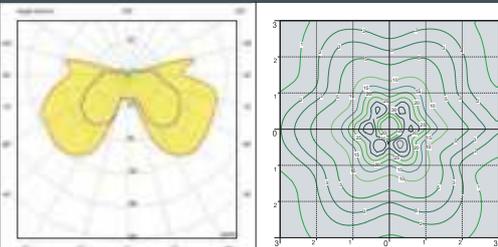

**RUT lantern clear with Fumagalli Led Lamp CCT set 8,5W.**


POST height 2mt  
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

\* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

# RUT

MEDIUM SIZE

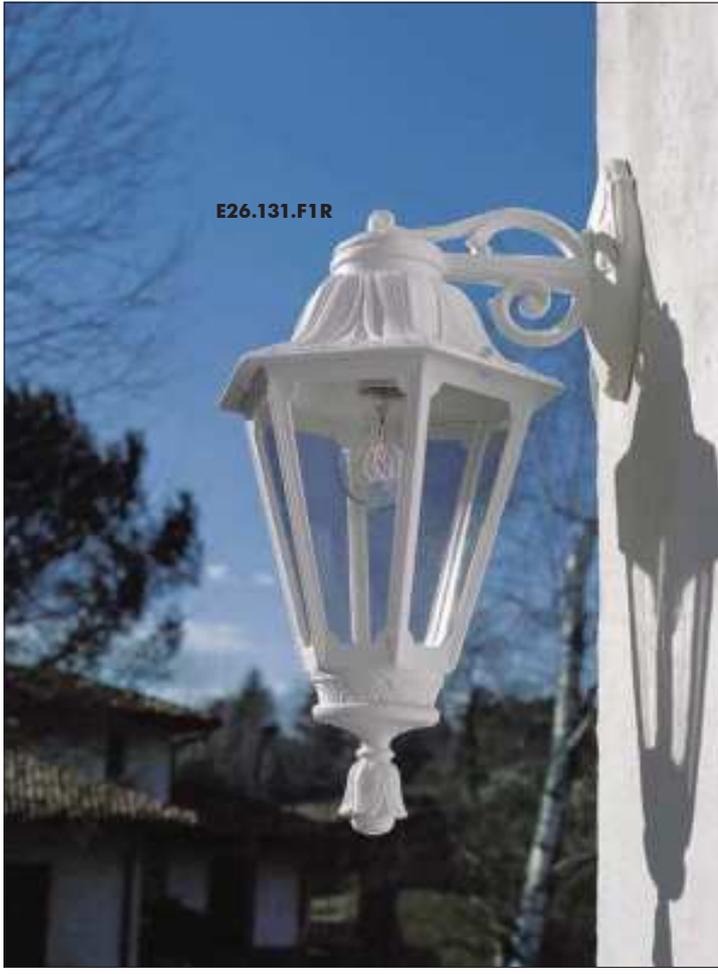



**BISSO/RUT**

<b>E27</b> lampholder	E26.131.E27
<b>6,5W</b> filament	E26.131.F1R
<b>8,5W</b> CCT set	E26.131.V1K
<b>11W</b> CCT set	E26.131.T1K

Pcs 12  
Kg 19  
mc 0,225

**SICHEM/RUT**

<b>E27</b> lampholder	E26.120.E27
<b>6,5W</b> filament	E26.120.F1R
<b>8,5W</b> CCT set	E26.120.V1K
<b>11W</b> CCT set	E26.120.T1K

Pcs 12  
Kg 19  
mc 0,225

**RUT**  
E26.000

Pcs 1  
Kg 1,3  
mc 0,018

**MINILOT/RUT**

<b>E27</b> lampholder	E26.111.E27
<b>6,5W</b> filament	E26.111.F1R
<b>8,5W</b> CCT set	E26.111.V1K
<b>11W</b> CCT set	E26.111.T1K

Pcs 12  
Kg 19  
mc 0,225

**PORPORA/RUT**

<b>E27</b> lampholder	E26.141.E27
<b>6,5W</b> filament	E26.141.F1R
<b>8,5W</b> CCT set	E26.141.V1K
<b>11W</b> CCT set	E26.141.T1K

Pcs 1  
Kg 4  
mc 0,034

**IAFET/RUT resin**

<b>E27</b> lampholder	E26.162.E27
<b>6,5W</b> filament	E26.162.F1R
<b>8,5W</b> CCT set	E26.162.V1K
<b>11W</b> CCT set	E26.162.T1K

Pcs 2  
Kg 79  
mc 0,086

**MIZAR/RUT resin**

<b>E27</b> lampholder	E26.151.E27
<b>6,5W</b> filament	E26.151.F1R
<b>8,5W</b> CCT set	E26.151.V1K
<b>11W</b> CCT set	E26.151.T1K

Pcs 1  
Kg 3  
mc 0,07

**ALOE'.R/RUT resin**

<b>E27</b> lampholder	E26.163.E27
<b>6,5W</b> filament	E26.163.F1R
<b>8,5W</b> CCT set	E26.163.V1K
<b>11W</b> CCT set	E26.163.T1K

Pcs 2  
Kg 8,6  
mc 0,121

**ARTU'/RUT**

<b>E27</b> lampholder	E26.158.E27
<b>6,5W</b> filament	E26.158.F1R
<b>8,5W</b> CCT set	E26.158.V1K
<b>11W</b> CCT set	E26.158.T1K

Pcs 1  
Kg 9,6  
mc 0,148

**RUT**

MEDIUM SIZE





**RICU BISSO/RUT 2+1**

<b>E27</b> lampholder	E26.157.S21.E27
<b>6,5W</b> filament	E26.157.S21.F1R
<b>8,5W</b> CCT set	E26.157.S21.V1K
<b>11W</b> CCT set	E26.157.S21.T1K

Pcs 1  
Kg 15,2  
mc 0,214

**RICU BISSO/RUT 3+1**

<b>E27</b> lampholder	E26.157.S31.E27
<b>6,5W</b> filament	E26.157.S31.F1R
<b>8,5W</b> CCT set	E26.157.S31.V1K
<b>11W</b> CCT set	E26.157.S31.T1K

Pcs 1  
Kg 16,5  
mc 0,214

**GIGI/RUT**

<b>E27</b> lampholder	E26.156.E27
<b>6,5W</b> filament	E26.156.F1R
<b>8,5W</b> CCT set	E26.156.V1K
<b>11W</b> CCT set	E26.156.T1K

Pcs 1  
Kg 10,9  
mc 0,172

**RICU/RUT**

<b>E27</b> lampholder	E26.157.E27
<b>6,5W</b> filament	E26.157.F1R
<b>8,5W</b> CCT set	E26.157.V1K
<b>11W</b> CCT set	E26.157.T1K

Pcs 1  
Kg 11,7  
mc 0,18

**RICU BISSO/RUT 2L**

<b>E27</b> lampholder	E26.157.S20.E27
<b>6,5W</b> filament	E26.157.S20.F1R
<b>8,5W</b> CCT set	E26.157.S20.V1K
<b>11W</b> CCT set	E26.157.S20.T1K

Pcs 1  
Kg 14,2  
mc 0,214

**RICU BISSO/RUT 3L**

<b>E27</b> lampholder	E26.157.S30.E27
<b>6,5W</b> filament	E26.157.S30.F1R
<b>8,5W</b> CCT set	E26.157.S30.V1K
<b>11W</b> CCT set	E26.157.S30.T1K

Pcs 1  
Kg 15,2  
mc 0,214