


# LED Lamp

PAR16 Shape SMD 36degree - 5.5W 490lm CRI90+


type	LED Spot
shape	PAR16
application	indoor
power(W)	5.5
luminous flux	490lm
Efficacy(lm/W)	89.09
CRI	Ra>90
beam angle	36°
cap type	GU10
dimnable	No
input Voltage(V~)	100-240
frequency(Hz)	50/60Hz
power factor	>0.5
switching cycles	x12,500
operating temprature(°C)	-20 ~ 40
dimensions(mm)	dia.50 x H57
lifespan(h)	25,000
warranty(Y)	3
equivalent watt(W)	50
lumen maintenance @ 6000h	92%
survival factor @ 6000h	100%
starting time(s)	0.019
warm-up time up to 95% (s)	0.019

Model No.	Color temperature
05227001432	2700K
05227001402	3000K
05227001400	4000K

True & Natural colors when using CRI90+

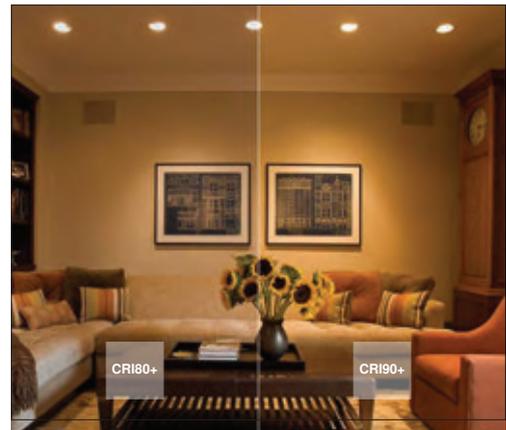

**3YEARS  
WARRANTY**



**CRI 90+**

Shows Colors True & Natural


# LED Lamp

PAR16 Shape SMD 36degree - 4.2W 350lm CCT Tunable

type	LED Spot
shape	PAR16
application	indoor
power(W)	4.2
luminous flux	350lm
Efficacy(lm/W)	83.33
CRI	Ra>80
beam angle	36°
cap type	GU10
dimnable	No
input Voltage(V~)	100-240
frequency(Hz)	50/60Hz
power factor	>0.5
switching cycles	x12,500
operating temprature(°C)	-20 ~ 40
dimensions(mm)	dia.50 x H54
lifespan(h)	25,000
warranty(Y)	3
equivalent watt(W)	50
lumen maintenance @ 6000h	92%
survival factor @ 6000h	100%
starting time(s)	0.029
warm-up time up to 95% (s)	0.029

Model No.	Color temprature
M4-4.2-3/4K (1)	3000/4000K
M4-4.2-3/6K (2)	3000/6500K

Easy control, simple function. • 2-step (3000K-4000K) or (3000K-6500K)

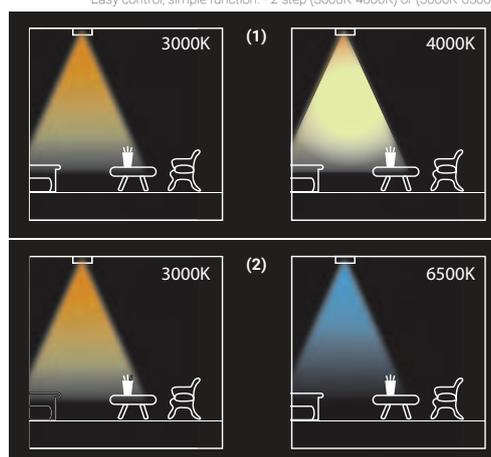

**3YEARS  
WARRANTY**

