



**5 YEARS
WARRANTY**


Specifications

Mounting	Ceiling recessed
LED module type	SMD LED chips
LED power	40W
Voltage rating/ freq.	220-240V / 50-60 Hz
Control gear type	Remote electronic LED driver
Power factor	>0.9
Degree of protection	IP 20
Light controller	Opal diffuser
Color temp.	4000K/6500K
Rated lifetime	50,000 Hrs (@25C°)
Dimension	595 x 595 x 32 mm





Light guide plate (LGP)
this panel does not contain LGP which guarantee zero chance of yellowing surface, dark areas, blueness or glowing edges

لا يحتوي على الطبقة الموجهة للضوء والذي يضمن عدم اصفرار السطح أو وجود مناطق غير مضيئة أو مناطق مضيئة باللون الأزرق أو حواف مضيئة



More Efficiency compared with edge-lit Panel due to direct illumination through opal diffuser only

كفاءة أعلى مقارنة بالإضاءة اللوحية التقليدية بسبب ان الضوء مباشر ويمر فقط من خلال ناشر الاوبال

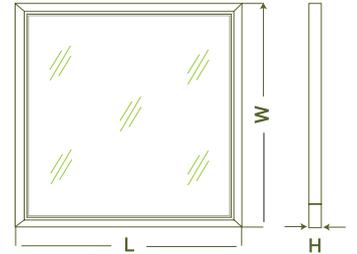

Model No.	Color Temp.
BLED066DLX-6.5K	6500K
BLED066DLX-4.0K	4000K

