COMPANY
SOLAR
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGTH
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

MARY
SMALL SIZE

fumagalli®
since 1973

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.
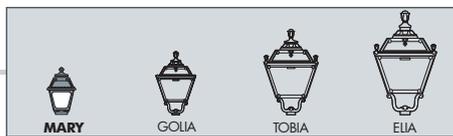
Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** *adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

NEW NEW

6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K · 6500 K

CCT SET

+80°C -30° | 90% HUMIDITY | VOLTAGE SURGE RESISTANT

TÜV SUD

INDOOR & OUTDOOR USE

Q18.110.F1R

CE CB IECEE CB SCHEME U.V. UV-TREATED CLASS II DOUBLE INSULATION RESIDENTIAL 360° FILAMENT LED

RECYCLABLE ANTI-SHOCK +90° -60° TEMPERATURE WALL HANGING POST

MADE IN ITALY

MARY

SMALL SIZE

fumagalli®
since 1973

| MARY | GOLIA | TOBIA | ELIA |

MARY - LANTERN COMPONENTS

IP55

Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

MARY

Q18.000 *

180

290

Ø 60

Dimensions and weight
Height: 290 mm
Width: 180 mm
Depth: 180 mm
Weight: 1 Kg

Moulded colours:
■ Black □ White

Painted colours:
■ Antique green ■ Antique bronze

Diffuser PMMA:
■ Clear □ Opal

E27 FILAMENT

- Perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

E27 CCT SET(*)

- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 150 mm | **E27** lampholder only | .E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K	.V1K
			4000 K	
			2700 K	

6,5W filament
8,5W CCT
= 60W incandescent

SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB

LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)
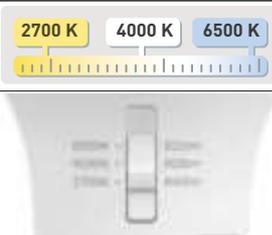
| 2700 K | 4000 K | 6500 K |

CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE
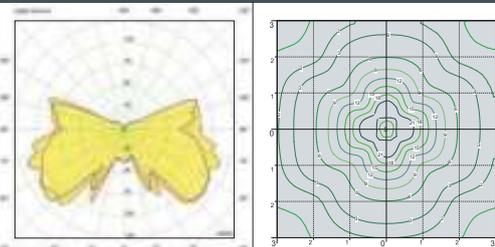
MARY lantern clear with Fumagalli Filament Led Lamp 6,5W.

POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY

SOLAR

UP&DOWN

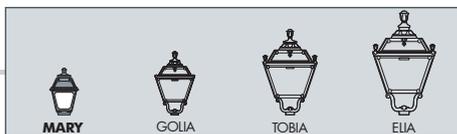DOWNLIGTH

IN-GROUND

BRICKLIGHT

FLOODLIGTH

BOLLARD

BULKHEAD

GARDEN

URBAN CLASSIC

URBAN MODERN

POST

LAMPS

REFERENCES

MARY

SMALL SIZE

fumagalli®
since 1973

Q18.151.F1R

Q18.131.F1R

Q18.120.F1R

MADE IN ITALY

fumagalli®
since 1973

MARY   GOLIA   TOBIA   ELIA

BISSO/MARY	
E27 lampholder	Q18.131.E27
6,5W filament	Q18.131.F1R
8,5W CCT set	Q18.131.V1K

Pcs 18
Kg 27,6
mc 0,209

255
430

SICHEM/MARY	
E27 lampholder	Q18.120.E27
6,5W filament	Q18.120.F1R
8,5W CCT set	Q18.120.V1K

Pcs 18
Kg 29,1
mc 0,209

180
780

MARY	
Q18.000	

Pcs 1
Kg 1
mc 0,011

180
290
Ø 60

MIKROLOT/MARY	
E27 lampholder	Q18.110.E27
6,5W filament	Q18.110.F1R
8,5W CCT set	Q18.110.V1K

Pcs 18
Kg 25,4
mc 0,209

180
365
Ø 130

PORPORA/MARY	
E27 lampholder	Q18.141.E27
6,5W filament	Q18.141.F1R
8,5W CCT set	Q18.141.V1K

Pcs 1
Kg 3,5
mc 0,024

470
470

MIZAR/MARY resin	
E27 lampholder	Q18.151.E27
6,5W filament	Q18.151.F1R
8,5W CCT set	Q18.151.V1K

Pcs 1
Kg 2,8
mc 0,044

180
1080
Ø 50
Ø 150

COMPANY
SOLAR
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLITGH
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY

SOLAR

UP&DOWN

DOWNLIGHT

IN-GROUND

BRICKLIGHT

FLOODLIGTH

BOLLARD

BULKHEAD

GARDEN

URBAN CLASSIC

URBAN MODERN

POST

LAMPS

REFERENCES

MARY

SMALL SIZE

fumagalli®
since 1973

Q18.158.S20.F1R

Q18.110.F1R

Q18.156.S30.F1R

fumaTech®
FUMAGALLI POLES TECHNOLOGY

MADE IN ITALY

COMPANY

MARY
SMALL SIZE

SOLAR

UP&DOWN

DOWNLIGHT

IN-GROUND

BRICKLIGHT

FLOODLITGH

BOLLARD

BULKHEAD

GARDEN

URBAN CLASSIC

URBAN MODERN

POST

LAMPS

REFERENCES

fumagalli®
since 1973

MARY   GOLIA   TOBIA   ELIA

ARTU' BISSO/MARY 2+1	
E27 lampholder	Q18.158.S21.E27
6,5W filament	Q18.158.S21.F1R
8,5W CCT set	Q18.158.S21.V1K

Pcs 1
Kg 17,5
mc 0,176

570
1960
2+1

ARTU' BISSO/MARY 3+1	
E27 lampholder	Q18.158.S31.E27
6,5W filament	Q18.158.S31.F1R
8,5W CCT set	Q18.158.S31.V1K

Pcs 1
Kg 17,9
mc 0,176

520
1960

GIGI BISSO/MARY 2+1	
E27 lampholder	Q18.156.S21.E27
6,5W filament	Q18.156.S21.F1R
8,5W CCT set	Q18.156.S21.V1K

Pcs 1
Kg 18,8
mc 0,182

570
2280
2+1

GIGI BISSO/MARY 3+1	
E27 lampholder	Q18.156.S31.E27
6,5W filament	Q18.156.S31.F1R
8,5W CCT set	Q18.156.S31.V1K

Pcs 1
Kg 20,3
mc 0,182

520
2280
3+1

ARTU' BISSO/MARY 2L	
E27 lampholder	Q18.158.S20.E27
6,5W filament	Q18.158.S20.F1R
8,5W CCT set	Q18.158.S20.V1K

Pcs 1
Kg 16,5
mc 0,176

570
1830
2
Ø 245

ARTU' BISSO/MARY 3L	
E27 lampholder	Q18.158.S30.E27
6,5W filament	Q18.158.S30.F1R
8,5W CCT set	Q18.158.S30.V1K

Pcs 1
Kg 17,4
mc 0,176

520
1830
3
Ø 245

GIGI BISSO/MARY 2L	
E27 lampholder	Q18.156.S20.E27
6,5W filament	Q18.156.S20.F1R
8,5W CCT set	Q18.156.S20.V1K

Pcs 1
Kg 18,4
mc 0,182

570
2070
2
Ø 245

GIGI BISSO/MARY 3L	
E27 lampholder	Q18.156.S30.E27
6,5W filament	Q18.156.S30.F1R
8,5W CCT set	Q18.156.S30.V1K

Pcs 1
Kg 19,5
mc 0,182

520
2070
3
Ø 245